

RELIABLE SECURE CONNECTIVITY

XEG7612/XEG7616/XEG7620 Series

12, 16 or 20-Port High-Bandwidth Industrial Managed Layer-3 Gigabit PoE Switch





XEG7612/XEG7616/XEG7620 Series

12, 16 or 20-Port High-Bandwidth Industrial Managed Layer-3 Gigabit PoE Switch



FEATURE HIGHLIGHTS

- Up to 16 10/100/1000 RJ45 ports or 100/1000 BASE-X SFP slots. Plus 4 dedicated 1/10G Uplink SFP slots
- Up to 8x 802.3af/ 802.3at PoE/PoE+ Power over Ethernet ports, with maximum 30W PoE power per port and up to 240W power budget.
- Powerful Layer-3 Switching, supporting BGPv4, IPv4 Static, RIPv1/v2 and OSPFv2
- Redundancy through ITU-T G.8032 ERPS Ring, RSTP, STP, MRP (Client), compatible rings and compatible chains.
- UL 62368-1:2014, CE/FCC, NEMA TS-2 certified for traffic control
- IEEE 1588v2 Precision Time Protocol Hardware-Based End-to-End TC
- Wide temperature operations, from -40°C to 70°C

PRODUCT DESCRIPTION

Designed to be adaptive, with unprecedented throughput Agatel's XEG7612/16/20 Series offers 24 different versions and 24 making it a very flexible product based on your specific needs for Layer-3 Switching. No matter if the 12, 16 or 20 port version, this device offers 4 x 1/10 Gigabit Ethernet SFP uplinks making it a cost-effective, reliable industrial solution where high-throughput and high-reliability is fundamental.

Layer-3 routing support BGPv4, IPv4 static routing, RIP v1/v2 and OSPFv2.

Designed for PoE, in wide temperature XEG7612/16/20 supports up to 20 Gigabit ports in different configurations, either Copper, PoE or Fiber, any 8-port multiple configurations. Specifically designed for bringing power through Ethernet cable virtually anywhere, a maximum output Power over Ethernet of 240W over a maximum of 8 PoE/PoE+ ports is allowed (802.3af/at).

Rugged, Wide-Temperature, Well protected design XEG7612/16/20 is EN61000-6-2, EN61000-6-4, IEC/EN/UL62368-1:2014 and FCC certified and is designed to withstand the harshest environments and the most demanding EMC environment. Its fan-less design and EMC Level 3 protection guarantee reliable operations within -40 and +70°C, guaranteeing no packet is lost with all ports running full power and makes it suitable to be used for almost every application.

Powerful and versatile With its high performance, it provides network redundant self-recovery mechanism is less than 20ms on full load that enables the user to build a reliable network through almost any redundant ring topology. It supports ITU-T G.8032 ERPS Ring, IEEE802.1D-2004 RSTP, STP, MSTP, MRP (Client), iA-Ring, iA-Chain and many compatible rings protocols for network redundancy. With a Multifunctional web dashboard, it offers intelligent features such as QoS, VLAN, IGMP, Port mirroring and security.

Application-Specific NEMA TS-2 Certification makes XEG7612/16/20 family the perfect choice for Smart City and Traffic Control applications.



Technical Specifications		
Model Name	XEG7612 (12 ports) ; XEG7616 (16 ports); XEG7620 (20 ports)	
Priority Queues	8	
VLAN Table	4096	
MAC-Based VLAN	512	
VLAN ID Range	VID 1 to 4094	
Trunk Group	4	
Static IGMP Groups	128	
Dynamic IGMP Groups	256	
MAC Table Size	16K	
Packet Buffer Size	1.5 MB	
Jumbo Frame	9216 Byte	
Ethernet		
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3ae For 10 Gigabit Ethernet Fiber IEEE 802.3x for Flow Control, back pressure flow control IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1p for Class of Service IEEE 802.1X for Authentication IEEE 802.3ad for Port Trunk with LACP IEEE 802.3az for Energy Efficient Ethernet	
Protocols	IPv4, IPv6, IGMPv1/v2/v3, IGMP Snooping, GARP, GMRP, GVRP, SNMPv1/v2c/ v3, SNMP Inform, ICMP, Telnet, SSH, DHCP Server/Relay/Client, DHCP Option 66/67/82, BootP, RARP, TFTP, SMTP, SMTP (Gmail), RMON, HTTP, HTTPS, Syslog,MRP (Manager/ Client), LLDP,802.1x,EAP,RADIUS,TACACS+,Mirror port, QoS, ACL,BGPv4, DHCP Snooping, ARP Spoof Prevention, Dynamic ARP Inspection, MLD, UDLD, IP Source Guard	
Layer-3 Protocols	Routing: IPv4 Unicast static routing, RIP v1/v2, OSPFv2, Multicast: IGMPv1/v2/v3, DVMRP, PIM-DM, PIM-SM, PIM-SSM Routing Redundancy: VRRP (Virtual Router Redundancy Protocol)	
Redundancy	ITU-T G.8032 ERPS Ring, STP, RSTP, MSTP, Compatible Ring/Chain, U-Ring	
Time Synchronization	Network Synchronization	NTP Server/Client, SNTP
	Precision Network Synchronization	IEEE1588v1 OC/BC (Software) IEEE1588v2 E2E TC (Hardware) - ns acc. IEEE1588v2 OC/BC (Software)
Automation Profiles	Modbus/TCP device status registers	
SNMP MIB	MIB II, IF-MIB, SNMPv2 MIB, BRIDGE-MIB, RMON MIB Group 1,2,3,9, RFC RFC 1157, RFC 1213, RFC 1215, RFC 1493, RFC 1643,RFC 1757, RFC 2011,RFC 2012, RFC 2013, RFC 2233, RFC 2571, RFC 2742, RFC 2819, RFC 2863,RFC 3411, RFC 3412, RFC 3413, RFC 3414, RFC 3415, RFC 2674	
Power		
Input Voltage	9-57 VDC for Non-PoE models 45-57 VDC for 802.3af mode 51-57 VDC for 802.3at mode	
Input Current (System)	Max. 2.2 A @ 12 VDC (without PoE) Max. 3.3 A @ 45 VDC (Support up to 8 ports at 15.4W per PoE port) Max. 5.2 A @ 51 VDC (Support up to 8 ports at 30W per PoE port)e	
Power Consumption (System)	Max. 26.4 W @ 12 VDC (without PoE) Max. 148.5 W @ 45 VDC (Support up to 8 ports at 15.4W per PoE port) Max. 265.2 W @ 51 VDC (Support up to 8 ports at 30W per PoE port)	
Connector	5-Pin 5.08mm Lockable Terminal Block	
Reverse Polarity Protection	Yes	



Interfaces	
RJ45 Ports	Up to 16 10/100/1000BASE-T(X) auto negotiation speed
Fiber Optics Ports	Up to 16 100/1000BASE-X SFP slot plus 4 1000BASE-X or 4 10G SFP slots
LED Indicators	PWR1, PWR2, Alarm, Run, Ring, Ring Master, RJ-45 Link/Speed, SFP Link, PoE
Console	RS232 (RJ45 connector)
Relay Output	2 relay outputs with current carrying capacity of 1A @ 24 VDC
DIP Switches	Ring Control and Profinet Setting
Button	Reset Button
Physical Characteristics	
Housing	IP30 SPCC Metal housing, ruggedized Heat-sink
Dimension (W x H x D)	XEG7612: 76 x 200 x 160 mm; XEG7616-XEG7620: 95 x 200 x 160 mm
Weight	2,500 g
Installation	DIN-Rail, Wall mount (optional kit)
Environmental Limits	
Operating Temperature	-40°C~70°C (-40°F~158°F)
Storage Temperature	-40°C~85°C (-40°F~185°F)
Ambient Relative Humidity	5%~95%, 55°C (Non-condensing)




REGULATORY APPROVALS

Regulatory Approvals				
Safety	UL62368-1, 2nd Ed., CSAC22.2 N. 62368-1-14,NZS62368.1:2018,EN62368-1:2014+A11:2017			
Traffic Control	NEMA TS-2			
EMC	FCC Part 15, Subpart B, Class A EN 55032, EN 55024, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-6-4,			
Test		Item	Value	Level
IEC 61000-4-2	ESD	Contact Discharge Air	±6KV	3
		Discharge	±8KV	3
IEC 61000-4-3	RS	80-1000MHz	10(V/m)	3
		1.4-2.0GHz	3(V/m)	3
		2.0-2.7GHz	10(V/m)	3
IEC 61000-4-4	EFT	AC Power Port	±2.0kV	3
		DC Power Port	±2.0kV	3
		Signal Port	±1.0kV	3
IEC 61000-4-5	Surge	DC Power Port	Line-to Line±1.0kV Line-to	3
		DC Power Port	Earth±2.0kV Line-to	3
		Signal Port	Earth±2.0kV	3
IEC 61000-4-6	CS	0.15-80MHz	10V rms	3
IEC 61000-4-8	PFMF	Enclosure	30 V/m	4
IEC 61000-4-11	DIP	AC Power Port	-	A
Shock Drop Vibration	MIL-STD-810G Method 516.5 MIL-STD-810F Method 516.5 MIL-STD-810F Method 514.5 C-1 & C-2			
RoHS II	Yes			
MTBF	20 Years			





DIMENSIONS & LAYOUT

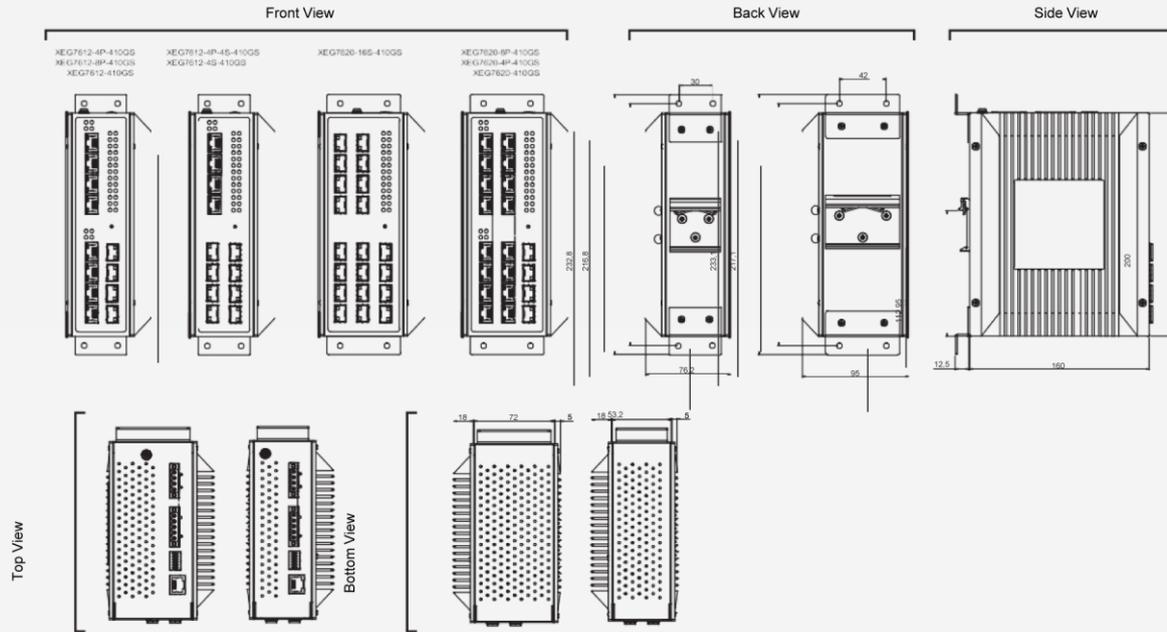

ORDERING INFORMATION

Model name	Description
XEG7612-8P-410GS	4P*1GTX RJ45/PoE;4P*10GFX SFP
XEG7612-410GS	8*1G RJ45;4*10G SFP
XEG7612-4P-410GS	4*1G RJ45;4*1G PoE;4*10G SFP
XEG7612-4S-410GS	4*1G RJ45;4*1G/4*10G SFP
XEG7612-4P-4S-410GS	4*1G PoE;4*1G/4*10G SFP
XEG7616-410GS	12*1G RJ45;4*10G SFP
XEG7616-4P-410GS	8*1G RJ45;4*1G PoE;4*10G SFP
XEG7616-8P-410GS	4*1G RJ45;8*1G PoE;4*10G SFP
XEG7616-4S-410GS	8*1G RJ45;4*1G/4*10G SFP
XEG7616-4P-4S-410GS	4*1G RJ;4*1G PoE;4*1G/4*10G SFP
XEG7616-8P-4S-410GS	8*1G PoE;4*1G/4*10G SFP
XEG7616-8S-410GS	8*1G RJ45;4*1G/4*10G SFP
XEG7616-4P-8S-410GS	4*1G PoE;8*1G SFP;4*10G SFP
XEG7616-12S-410GS	12*1G SFP;4*10G SFP
XEG7516-8P-410GS (Marine)	4*1G RJ45;8*1G PoE;4*10G SFP
XEG7620-410GS	12*1G RJ45;4*10G SFP
XEG7620-4P-410GS	12*1G RJ45;4*1G PoE;4*10G SFP
XEG7620-8P-410GS	8*1G RJ45;8*1G PoE;4*10G SFP
XEG7620-4S-410GS	12*1G RJ45;4*1G/4*10G SFP
XEG7620-4P-4S-410GS	8*1G RJ;4*1G PoE;4*1G/4*10G SFP
XEG7620-8P-4S-410GS	4*1G RJ;8*1G PoE;4*1G/4*10G SFP
XEG7620-8S-410GS	8*1G RJ45;8*1G SFP;4*10G SFP
XEG7620-12S-410GS	4*1G RJ45;12*1G SFP;4*10G SFP
XEG7620-4P-12S-410GS	4*1G PoE;12*1G SFP;4*10G SFP
XEG7620-16S-410GS	16*1G SFP;4*10G SFP





OPTIONAL ACCESSORIES

Model name	Description
XWK450-A-BK	Aluminum wall mount kit
XCC-RJ45-DB9-90-F	RJ45 to DB9 Female Cross Over Console Cable, 90cm
XDP-75-24	75W/3.2A DIN-Rail 24VDC power supply 88~264VAC / 124~370VDC input
XDP-240-48	240W/5A DIN-Rail 48~55VDC power supply 88~264VAC / 124~370VDC input
XDP-480-48	480W/10A DINRail 48~55VDC power supply 88~264VAC /124~370VDC input
XTR-38-FM-2K	SFP Transceiver, 155Mbps, 1310nmLED, Multi-mode, 2km, 3.3V, -40~85°C
XTR-38-FS-30K	SFP Transceiver, 155Mbps, 1310nmFP, Single-mode, 30km, 3.3V, -40~85°C
XTR-28-SX-550M	SFP Transceiver, 1250Mbps, 850nmVCSEL, Multi-mode, 550m, 3.3V, -20~85°C
XTR-38-SX-2K	SFP Transceiver,1250Mbps, 1310nmFP,Multi-mode, 2km, 3.3V,-40~85°C
XTR-38-LX-10K	SFP Transceiver, 1250Mbps, 1310nmFP, Single-mode, 10km, 3.3V, -40~85°C
XTR-38-LX-30K	SFP Transceiver, 1250Mbps, 1310nmDFB, Single-mode, 30km, 3.3V, -40~85°C
XTR-28-10G-SR	SFP Transceiver, 10Gbps, 851nmVCSEL,Multi-mode,3.3V,33m/82 m, -10~85°C





WHO WE ARE

Built on 20 years of experience in designing and manufacturing industrial networking products, **Agatel** was established from the UK to serve the infrastructure and industrial sectors in EMEA markets with reliable connectivity for mission-critical systems in demanding environments.

Experienced in hardware and software design and integration, we produce high-quality yet cost-effective industrial networking and communication products with great customization capabilities and robust implementations, equipping our customers for reliable secure industrial networks.



WHAT WE OFFER

The needs of our customers' industry are different from those of corporate IT environments – industrial operating environments are tough and the impact of failure in the field can lead to business threatening situations, hence our products will have lifetimes in excess of 20 years.

From entry-level to high-performance industry-certified hardware, **Agatel** offers a full solution spectrum to suit our customers' budgets and application requirements, with features such as industrial-grade reliability, integrated security, network redundancy, and advanced performance.

Our product solution profile includes industrial Ethernet switches, network time servers, media converters, industrial wireless devices, and serial device servers, covering a wide array of mission-critical applications such as automation, security, transport, water, oil and gas, and power grids.



WHY CHOOSE US

We help our customers reduce downtime and operational costs of their industrial applications in harsh environments. Leading system integrators in EMEA rely on our niche technical expertise and product quality to increase their applications' robustness, revenues, and competitive differentiation.

Agatel ruggedized high-quality solutions are designed to deliver zero-network-downtime for harsh project demands, allowing for reliable connectivity to keep people and assets safe and secure in harsh and hazardous environments, and allowing customers to focus on growing their business.

Agatel Ltd

1st Floor, Apex House
Calthorpe Road, Edgbaston
Birmingham B15 1TR
United Kingdom

Tel: +44 203 488 6888
E-mail: info@agatel.co.uk
Website: www.agatel.co.uk